





BRY-AIR SYSTEMS
 DIV. of BRY-AIR, INC.
 ROUTE 37 WEST
 SUNBURY, OHIO 43074
 TEL (740) 965-2974
 FAX (740) 965-5470
 E-MAIL: systems@bry-air.com

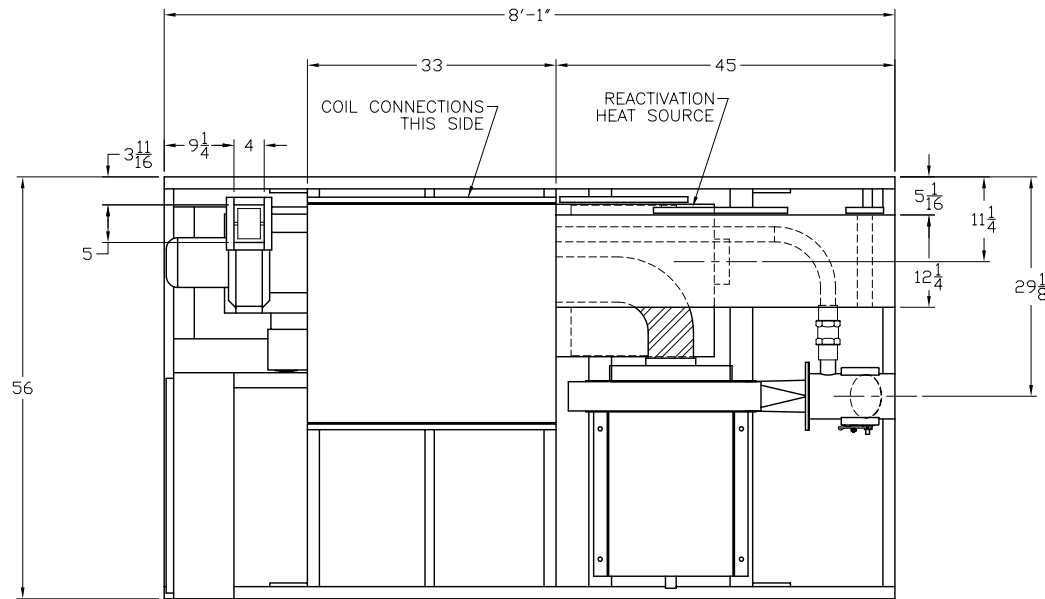

FDL-900 RESIN DRYER

SPECIFICATIONS	FDL-900
Process CFM	529
Reactivation CFM	204
Purge CFM	45
Process Ext. Static (inches w.c.)	12.0
Reactivation Ext. Static (inches w.c.)	0.75
Process motor H.P.	3
Reactivation motor H.P.	3/4
Bed motor H.P.	1/8
Reactivation Heat Req'd - MBH	66.0
Control Load - KVA @ 120 V	0.75
Approximate weight - lbs.	1500

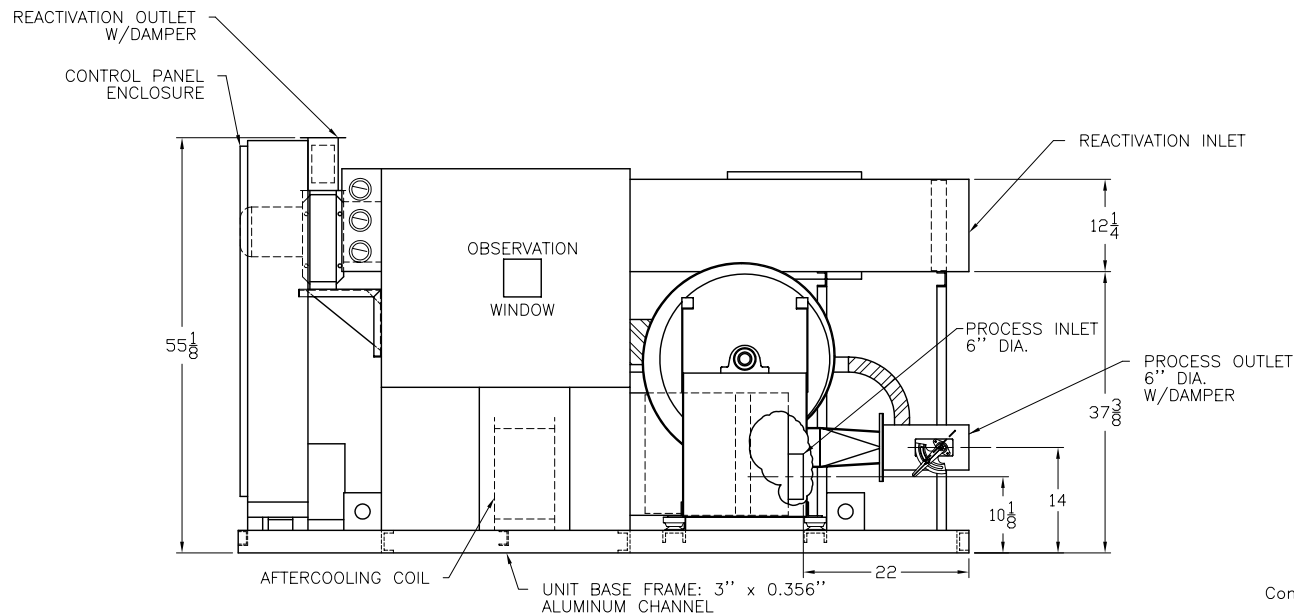

NOTES:

- Supply voltage must be specified.
- Electrical components are mounted in a drip proof enclosure.
- Unless otherwise noted, provide 25" clearance around the entire unit and 40" in front of the control panel enclosure.
- All dimensions are in inches and are subject to change without notice.
- Specifications subject to change without notice.
- One (1) piece of 6" Dia. x 12' long Red Silicone Hose is provided to connect Process Outlet to Hopper.
- One (1) piece of 6" Dia. x 12' long Black Neoprene Hose is provided to connect Process Inlet to Hopper.
- The dimensions shown are for standard indoor construction, direct fired gas or electric reactivation.

This is not a certified drawing.
 Contact factory for certified dimensional drawings.

BAS-2102
 11/21/03